

CHECK THAT THE SEAT IS PROPERLY INSTALLED

There are available, seats with three types of fixings

It is important that you know how to install the seat for it to be effective

Using just the seatbelt




Valid for all types of cars



Can be installed in car not equipped with the isofix system



Read carefully the instruction manual to correctly install the seat you have purchased

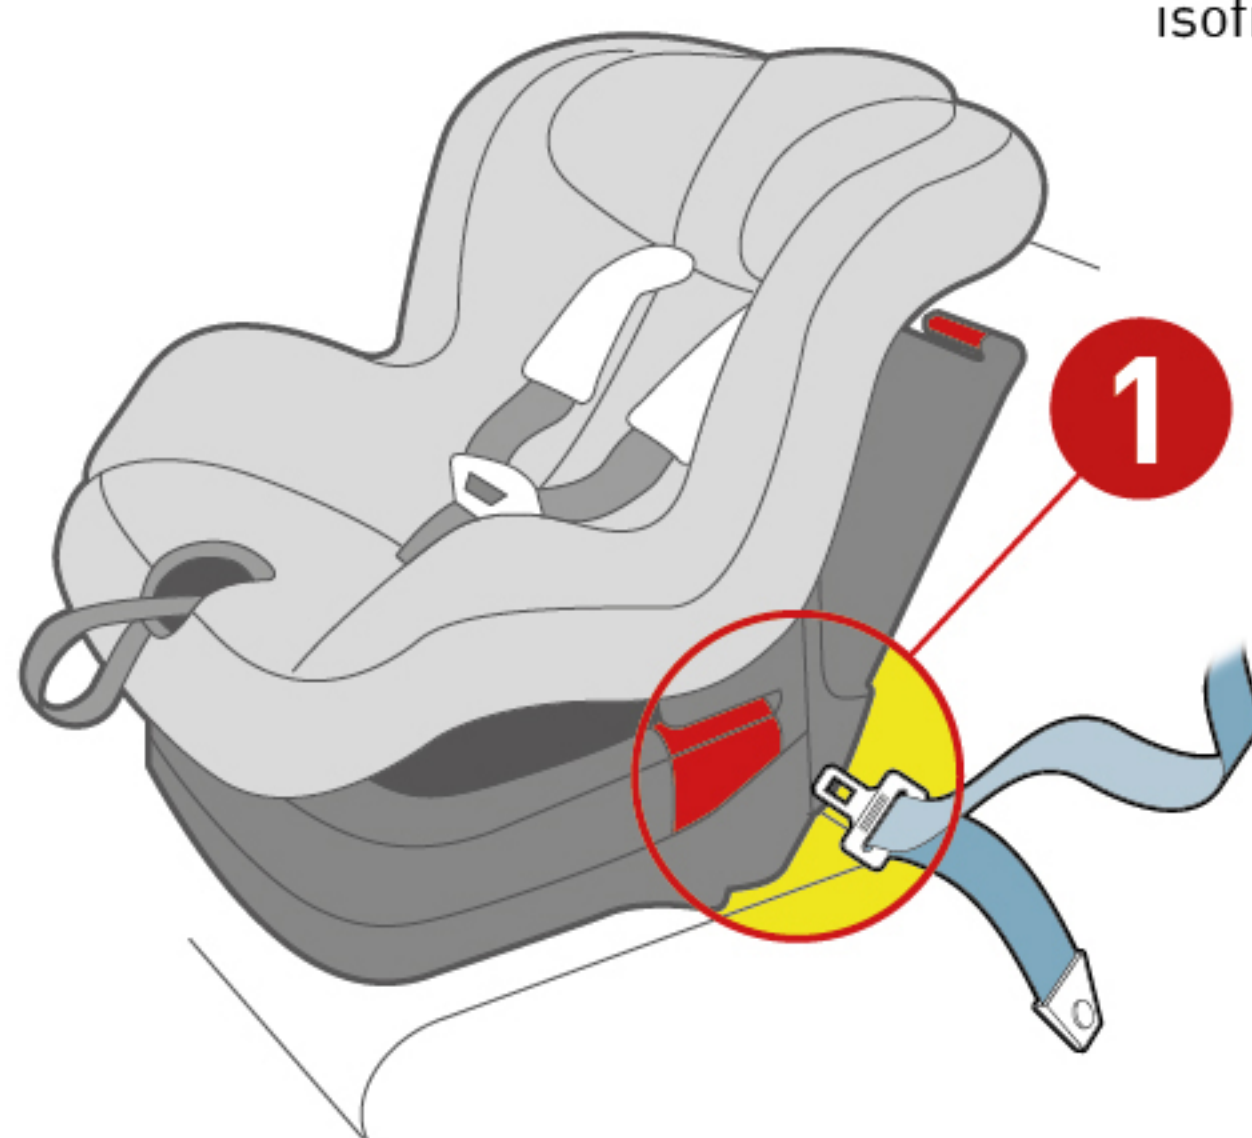

Generally, the car's seatbelt is threaded through the slots in the seat, found behind the backrest and depending on the type, sometimes under the seat

They may be brightly colored (usually red) or can have clamps to provide a better grip on strap of the seatbelt

2


Fix the seatbelt to the buckle of the seat and tighten it as much as you can so that the seat is surely fixed in place



¡CLIC!

3

If the seat has a third fixing point, pass the seatbelt through it and adjust it according to the manufacturer's instructions

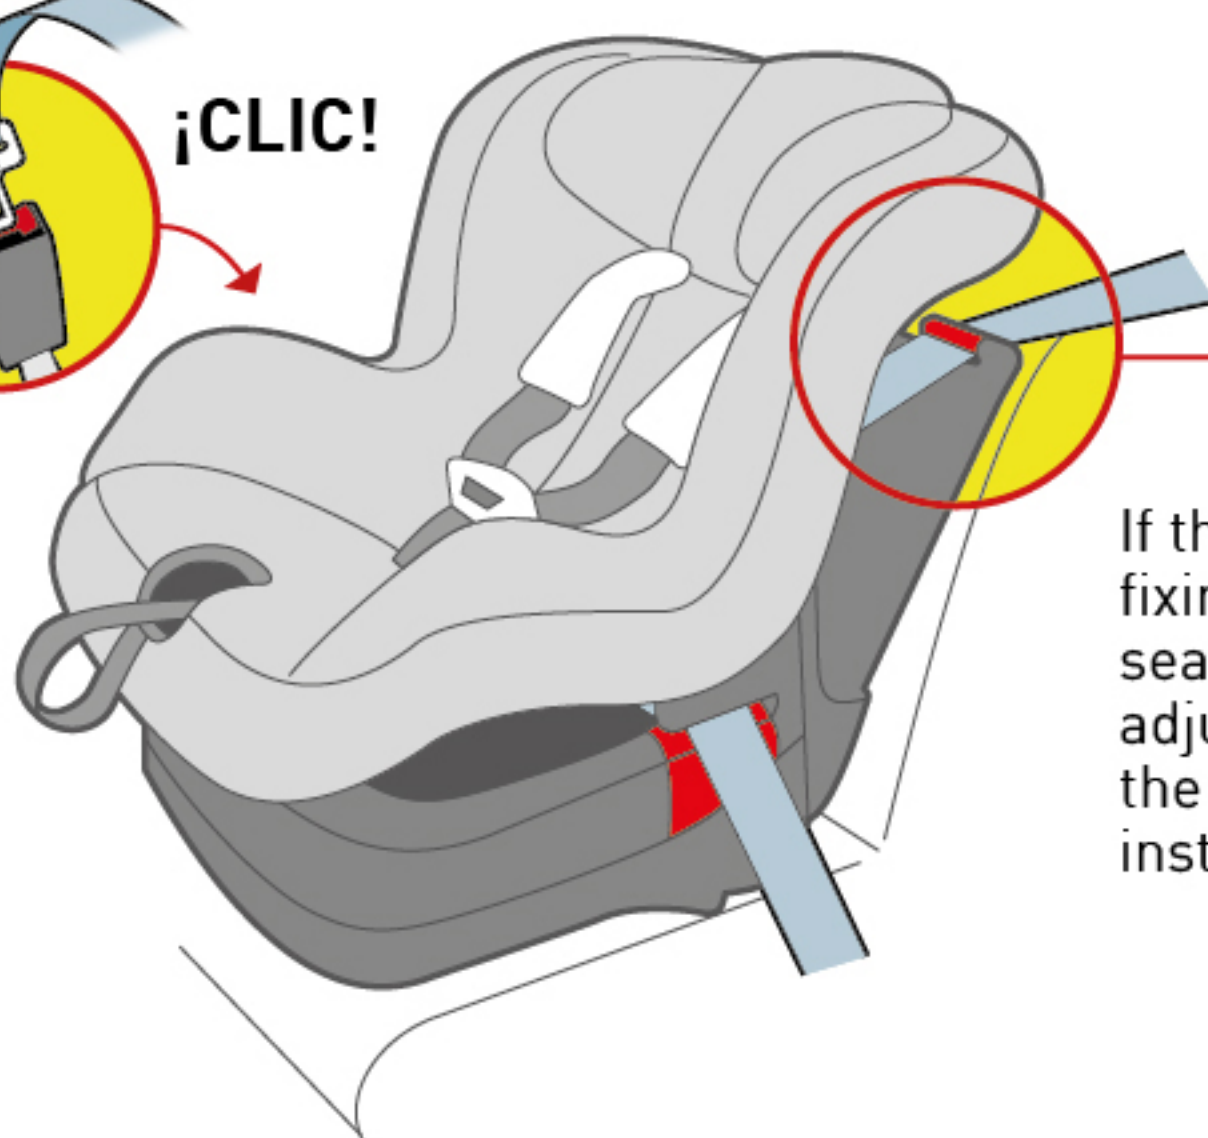

Combined system: seatbelt and isofix anchors



Valid for vehicles with or without the isofix system



These seats use two systems at the same time. They are fixed by the car's seatbelt as well as the isofix anchors (a system will be explained later on)


Isofix system with a third support



Only valid for vehicles with isofix anchors



The principal element of the isofix system is metal anchoring points found in the lower backrest of the car's seat. If your car is not equipped with these anchors you cannot use an isofix seat

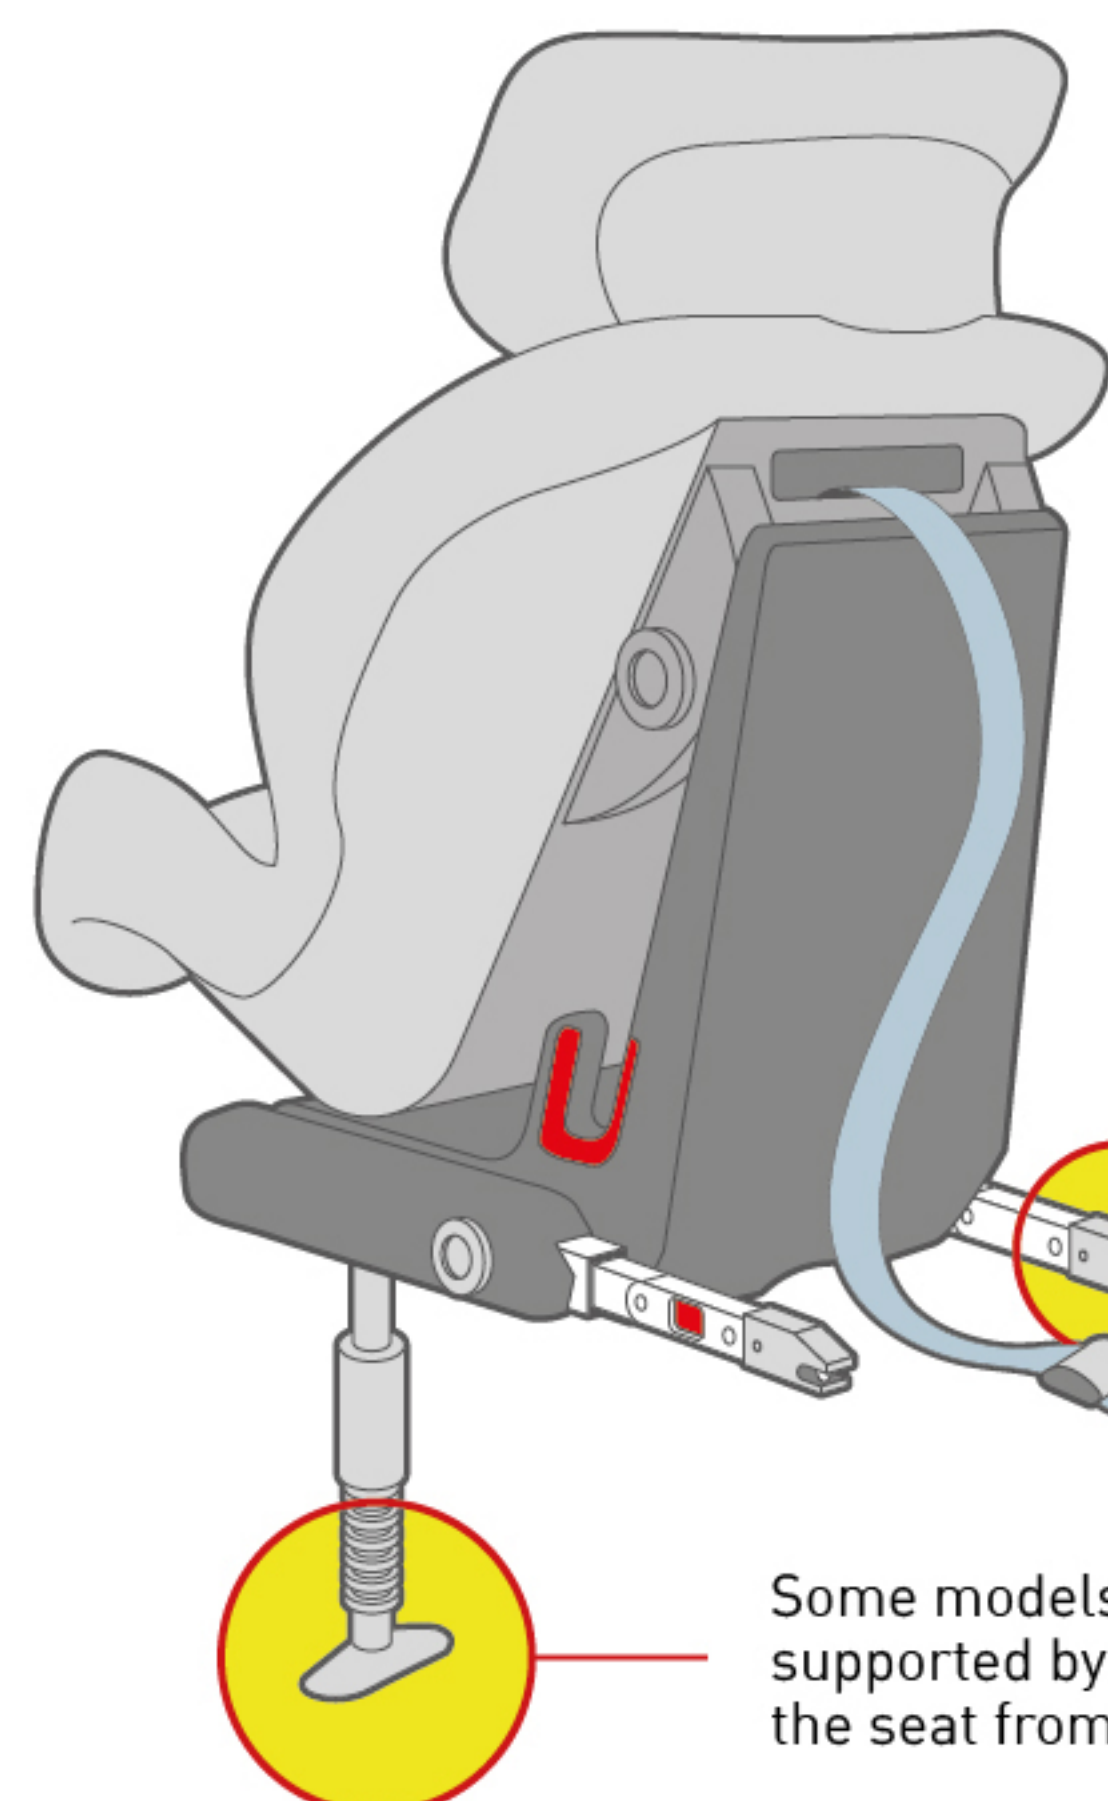

The seat has two lower arms that stick out at the back; these are fixed into the isofix anchors found in the back of car seat



If your car doesn't have these anchors you cannot use this type of seat

They have a strap that fastens to a ring in the car to stop it from tipping up

Some models incorporate an extendable leg, which is supported by the floor of the car, also to stop the seat from tipping up

You simply have to align the supports with the isofix openings and push the seat until you hear it click into place

1

Fix the anti-tipping strap known as the "top-tether" into the ring, which can usually be found in the back of the car seat backrest

2



¡CLIC!



To remove the seat, press the unlock buttons

If the seat has an anti-tipping leg, adjust it until it is sitting firmly on the floor of the car

3

